

SPECIFICATION FOR HCMOS/TTL COMPATIBLE SMT OSCILLATOR

MtronPTI P/N: M2005S119

Electrical Specifications:

Parameter	Symbol	Min.	Typ.	Max.	Units	Conditions
Frequency of Operation	F _O		3.072000		MHz	
Frequency Stabilities						
Frequency Stability	ΔF/F	-50		+50	ppm	
Output						
Output Type		HCMOS/TTL Compatible				
Output Load				50/10	pF/TTL	
Symmetry (duty cycle)	T _{DC}	45		55	%	Ref to ½ V _{DD}
Logic “1” Level	V _{OH}	90% V _{DD}			V	HCMOS load
Logic “0” Level	V _{OL}			10% V _{DD}	V	HCMOS load
Rise/Fall Time	T _R /T _F			7	ns	From 10% to 90% V _{DD}
Start-up Time	TSU			15	ms	
Tristate Function		Logic “1”, or floating, output enabled. Logic “0”, output disabled to a high impedance.				Pin 1
Supply Voltage & Power Consumption						
Operating Voltage	V _{DD}	2.97	3.3	3.63	V	
Operating Current	I _{DD}			60	mA	

Environmental & Mechanical Requirements:

Operating Temperature	T _A	-40		+85	°C	
Storage Temperature	T _S	-55		+125	°C	
Mechanical Shock	Per MIL-STD-202, Method 213, Condition C					
Vibration	Per MIL-STD-202, Methods 201 & 204					
Humidity	Per MIL-STD-202, Method 106.					
Altitude	Sea level to 70,000 feet max.					
Hermeticity	Per MIL-STD-883, Method 1014, Condition A1 & C1 (1 x 10 ⁻⁸ atm cc/s of Helium)					
Solderability	Per EIAJ-STD-002					
Max. Soldering Conditions	See solder profile, Figure 1					
Package Type	9 X 14 mm 4-J lead ceramic. Sn-Pb solder dipped leads.					

SPECIFICATION FOR HCMOS/TTL COMPATIBLE SMT OSCILLATOR

MtronPTI P/N: M2005S119

Dimensions, Marking, and Pin Out Information:

Pad	Function
1	Tristate
2	Ground
3	Output
4	+V _{DD}

Part Marking	
Line 1	M2005S119
Line 2	3.072000M
Line 3	MPTI yyww

Legend	
yy	Year
ww	Work week


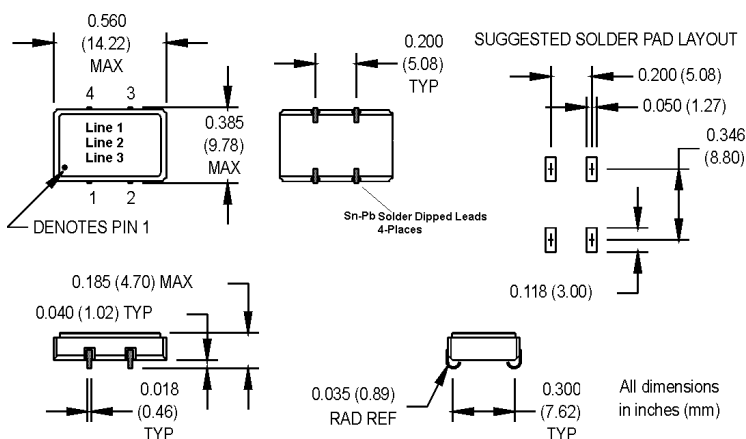


Figure 1

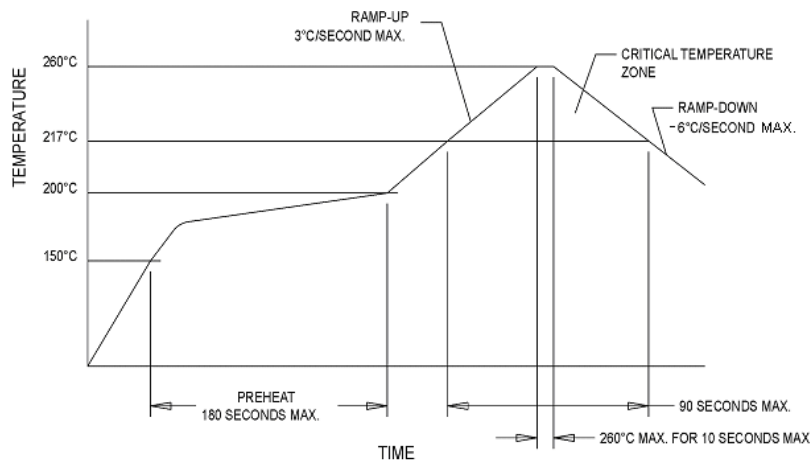

Datasheet Revision Table:

Date	Rev.	Author	Details of Revision
05/30/18	0	MM	Original release.
06/06/18	A	MM	Updated customer PN