

SPECIFICATION FOR 1.8V SMT OSCILLATOR

MtronPTI P/N M2180S033

Electrical Specifications:

Parameter	Symbol	Min.	Typ.	Max.	Units	Conditions
Frequency of Operation	F _O		100.000000		MHz	
Frequency Stability						
Frequency Stability	ΔF/F	-25		+25	ppm	Includes tolerance at +25 °C + deviation over operating temperature range.
RF Output						
Output Type		HCMOS/TTL Compatible				
Output Load				15	pF	
Symmetry (duty cycle)	T _{DC}	45	50	55	%	Ref to ½ V _{DD}
Logic "1" Level	V _{OH}	90% V _{DD}			V	HCMOS load
Logic "0" Level	V _{OL}			10% V _{DD}	V	HCMOS load
Rise/Fall Time	T _R /T _F			2	nS	10% to 90% V _{DD} HCMOS load
Tristate Control	T _{SU}	70% V _{DD} or NC			V	Pin1: Enables output.
				30% V _{DD}	V	Pin1: Output disabled to high-Z
Start-Up Time				10	mS	
Supply Voltage & Power Consumption						
Operating Voltage	V _{DD}	1.71	1.80	1.89	V	
Operating Current	I _{DD}			25	mA	

Environmental & Mechanical Requirements:

Operating Temperature	T _A	-40		+85	°C	
Storage Temperature	T _S	-55		+125	°C	
Mechanical Shock	Per MIL-STD-202, Method 213, Condition C (100 g's, 6 ms duration, ½ sine wave)					
Vibration	Per MIL-STD-202, Method 201 & 204 (10 g's from 10-2000 Hz)					
Thermal Cycle	Per MIL-STD-883, Method 1010, B (-55°C to 125°C, 15 min. dwell, 10 cycles)					
Hermeticity	Per MIL-STD-202, Method 112 (1 x 10 ⁻⁸ atm cc/s of Helium)					
Solderability	Per EIAJ-STD-002					
Max. Soldering Conditions	See solder profile, Figure 1					
Package Type	4-pad 5.0 X 7.0 X 1.8 mm leadless ceramic. RoHS compliant.					

SPECIFICATION FOR 1.8V SMT OSCILLATOR MtronPTI P/N M2180S033

Dimensions, Pin Out, and Marking Information:

Pad	Function
1	Tristate Control
2	Ground
3	Output
4	+V _{DD}

Part Marking	
Line 1	M2180S033
Line 2	100M0000
Line 3	M yywwvv

Legend	
yy	Year
ww	Work week
vv	Factory code

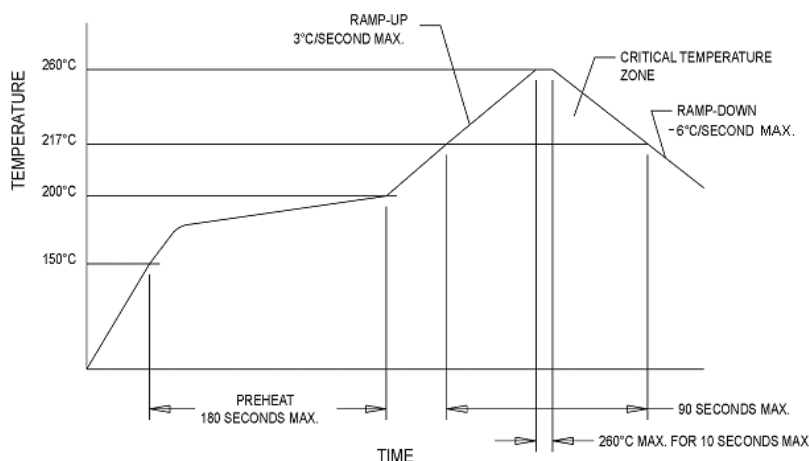
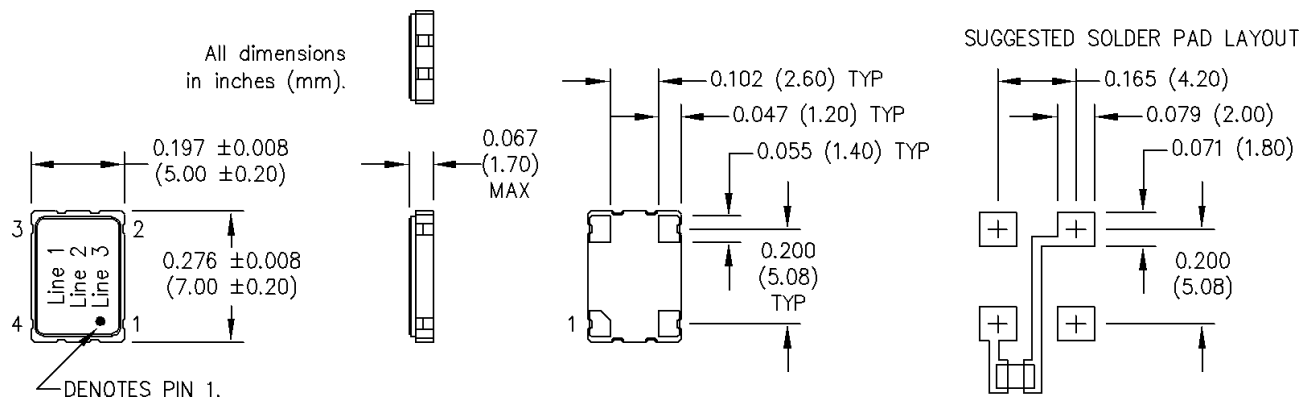


Figure 1

DATA SHEET REVISION TABLE:

Date	Rev.	Author	Details of Revision
06/29/17	0	MM	Original release.
11/03/17	A	MM	Added Customer part number.