



## SPECIFICATION FOR 3.3V LVDS SMT TCXO

### MtronPTI P/N M6300S096

#### Electrical Specifications:

Parameter	Symbol	Min.	Typ.	Max.	Units	Conditions
Frequency of Operation	$F_O$		184.320000		MHz	
Frequency Tolerance		-1.0		+1.0	ppm	@ +25°C
<b>Frequency Stability</b>						
vs. Temperature	$\Delta F/F$			1.0	ppm	(Max-Min)/2
vs. Aging		-3		+3	ppm	1 <sup>st</sup> year
		-1		+1	ppm	Per year thereafter.
<b>RF Output</b>						
Output Type		Differential LVDS Compatible				
Output Load		100 $\Omega$ Differential			V	
Common Mode Output Voltage			1.2		V	
Differential Output Voltage		250	425	500	mV	LVDS Load
Symmetry (duty cycle)	$T_{DC}$	45		55	%	Referenced to 1.2 V
Rise/Fall Time	$T_R/T_F$			0.35	nS	From 20% to 80% $V_{CC}$
<b>Supply Voltage &amp; Power Consumption</b>						
Operating Voltage	$V_{CC}$	3.135	3.3	3.465	V	
Operating Current	$I_{CC}$			100	mA	


#### Environmental Conditions:

Parameter	Symbol	Min.	Typ.	Max.	Units	Conditions
Operating Temperature	$T_A$	-40		+85	°C	
Storage Temperature	$T_S$	-55		+125	°C	
Shock	Per MIL-STD-202, Method 213, Condition C (100 g's, 6 ms duration, 1/2 sinewave)					
Vibration	Per MIL-STD-202, Method 201 & 204 (10 g's from 10-2000 Hz)					
Thermal Shock	Per MIL-STD-883, Method 1011, Condition A					
Thermal Cycle	Per MIL-STD-883, Method 1010, Condition B					
Hermeticity	Per MIL-STD-202, Method 112 (1 x 10 <sup>-8</sup> atm cc/s of helium)					
Moisture Sensitivity Level (MSL)	MSL 1					
Solderability	Per EIAJ-STD-002					
Max. Soldering Conditions	See Figure 1.					
Package Type	6-pad 5.0 X 7.0 X 1.9 mm leadless ceramic. RoHS compliant.					




## SPECIFICATION FOR 3.3V LVDS SMT TCXO MtronPTI P/N M6300S096

### Output Waveform:

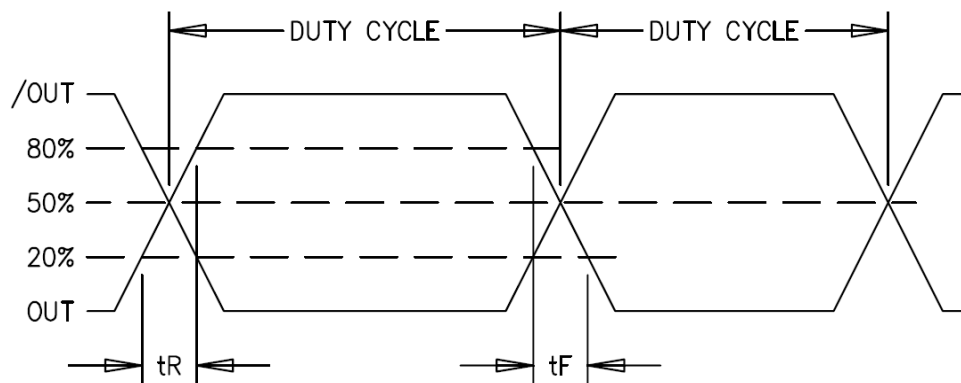

### Typical Test Circuit & Load Circuit Diagrams:

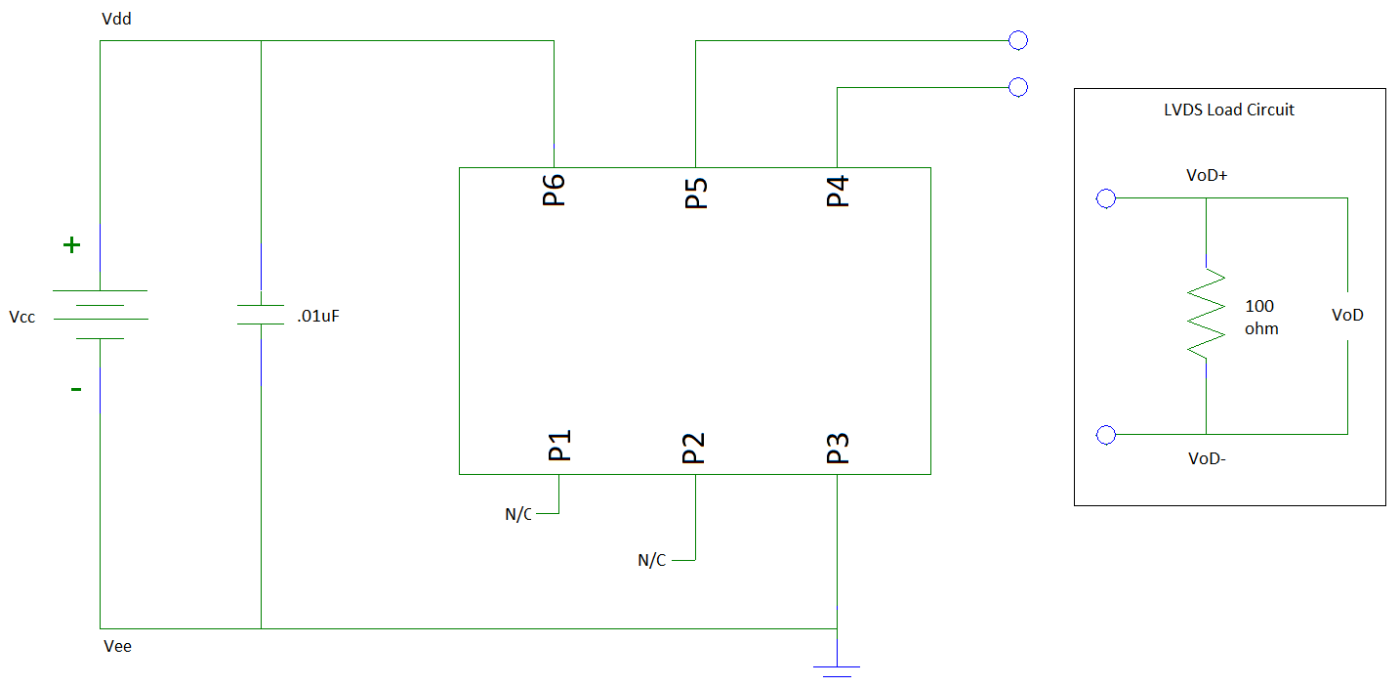



## SPECIFICATION FOR 3.3V LVDS SMT TCXO MtronPTI P/N M6300S096

### Soldering Conditions:


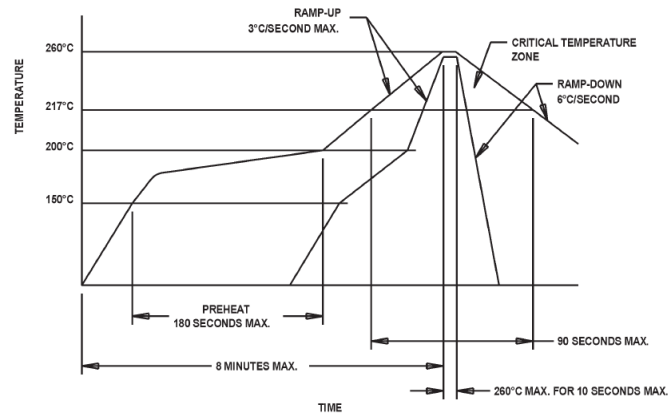


Figure 1

### Mechanical, Marking, and Pin Out Information:

Legend	
yy	Year
ww	Work week

Pin	Function
1	N/C
2	N/C
3	Ground
4	Output
5	Complementary Output
6	+V <sub>CC</sub>

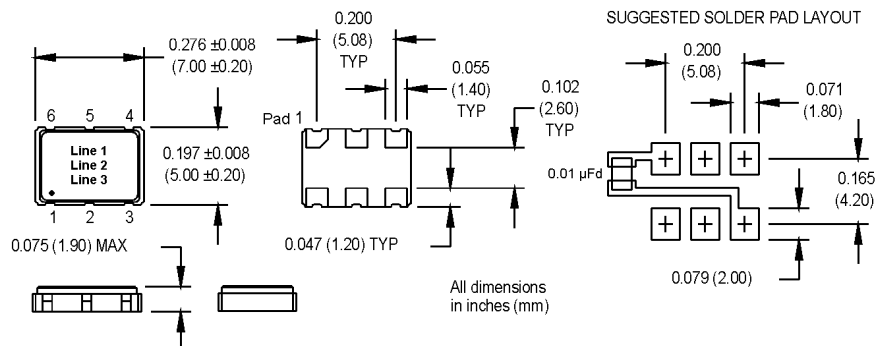

### Datasheet Revision Table:

Date	Rev.	Author	Details of Revision
01/16/18	0	MM	Original release.
01/26/18	A	MM	Updated Differential Output Voltage