

Specification for a Sinewave Output Thru-Hole OCXO

MtronPTI P/N: XO5085-044R

Electrical Specifications:

Parameter	Symbol	Min.	Typ.	Max.	Units	Conditions
Nominal Frequency	F ₀		100.000000		MHz	
Frequency Stabilities						
vs. Temperature	ΔF _T /F	-100		+100	ppb	Peak-Peak over the operating temperature range
10-Years Aging		-1.0		+1.0	ppm	After 30-days Power On
Short Term Stability			1 x 10 ⁻¹⁰			Allan Deviation, Tau = 0.1sec to 1sec
RF Output						
Output Type			Sinewave			
Output Level			+10		dBm	
Output Load			50		Ω	±10%
Frequency Adjustment						
Adjustment Method			External Voltage			
Adjustment Voltage	V _{TUNE}	0		+10	V _{DC}	
Adjustment Range			Sufficient for 10-years aging adjustment			
Modulation Bandwidth		1			kHz	3dB
Additional Parameters						
Phase Noise			-100		dBc/Hz	10Hz Offset
			-128		dBc/Hz	100Hz Offset
			-158		dBc/Hz	1kHz Offset
			-170		dBc/Hz	10kHz Offset
			-170		dBc/Hz	100kHz Offset
Harmonics				-25	dBc	
Spurious				-75	dBc	
Warm-up Time				4	minutes	@ 25°C, relative to 2-hrs after turn-on following 24-hrs off. To within ±0.1ppm of final frequency.
Temperature, Supply Voltage & Power Consumption						
Operating Temperature	T _A	-40		+85	°C	
Storage Temperature	T _S	-55		+95	°C	
Operating Voltage	V _S	+11.75	12.0	12.25	V _{DC}	
Power Consumption				2.0	Watts	Steady state @ 25°C, In Still Air
				4.0	Watts	@ Warm-up

Specification for a Sinewave Output Thru-Hole OCXO

MtronPTI P/N: XO5085-044R

Environmental Conditions:




MSL	Level 1
Seal	Hermetic
RoHS	Full RoHS Compliance

Mechanical, Marking and Layout Information:

Part Marking	
Line 1	MtronPTI
Line 2	XO5085-044R
Line 3	100.0000MHz
Line 4	Serial Number
Line 5	Date Code

Legend	
yy	Year
ww	Work Week

Pin	Function
1	RF Output
4	Case Ground
7	V _{TUNE}
13	N/C
19	Supply Voltage

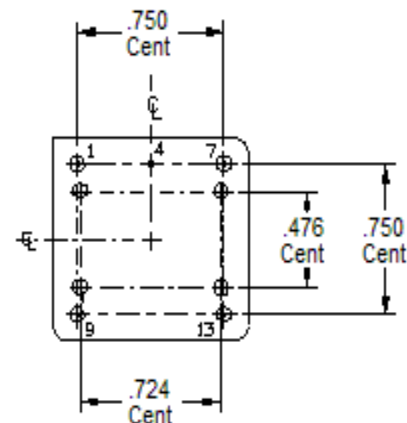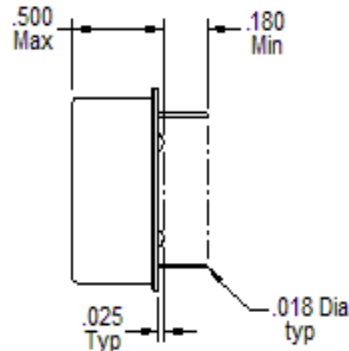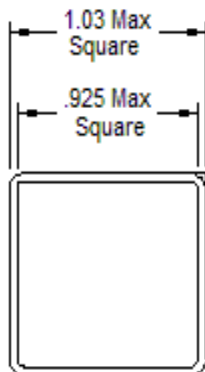

Data Sheet Revision Table:

Date	Rev.	Orig.	Details of Revision
09-30-15	C	DPD	Vcc changed from 5V to 12V and out power changed to 10dBm from 5dBm
09-29-15	B	DPD	OT change to -40C to 85C from -40C to 80C; Storage changed to -55C to +95C from -55C to 85C
09-15-15	A	DPD	Original Draft.