

**Specification for a Sinewave Output Thru-Hole
OCXO MtronPTI P/N: XO5085-068R**

Electrical Specifications:

Parameter	Symbol	Min.	Typ.	Max.	Units	Conditions
Nominal Frequency	F _O		100.0000		MHz	
Frequency Stabilities						
vs. Temperature	ΔF _T /F	-50		+50	ppb	Over the Operating Temperature Range
vs. Supply voltage variation		-30		+30	ppb	+/-250mV change in supply voltage
Daily Aging		-5		+5	ppb	After 30-days Power On
1 Year Aging		-0.5		+0.5	ppm	
20-Years Aging		-2.0		+2.0	ppm	
RF Output						
Output Type		Sinewave				
Output Level			12		dBm	
Output Load			50		Ω	±10%
Frequency Adjustment						
Adjustment Method		External Voltage				
Adjustment Voltage	V _{TUNE}	0		+10	V _D	
Adjustment Range		±1.0			ppm	Over all conditions
Adjustment Slope		Positive				
Additional Parameters						
Phase Noise (Under Static Conditions)				-100	dBc/Hz	10Hz Offset
				-132	dBc/Hz	100Hz Offset
				-162	dBc/Hz	1kHz Offset
				-172	dBc/Hz	10kHz Offset
				-178	dBc/Hz	100kHz Offset
				-178	dBc/Hz	1MHz Offset
				-178	dBc/Hz	10MHz Offset
G-sensitivity				0.5	ppb/g	
Harmonics				-25	dBc	
Spurious				-80	dBc	
Warm-up Time				5	minutes	To within ±0.1ppm of the frequency after 1-hour of operation @ 25°C
Temperature, Supply Voltage & Power Consumption						
Operating Temperature	OTR	-40		+85	°C	Full Specification Compliance
Storage Temperature	STR	-55		+85	°C	
Operating Voltage	V _{CC}	+11.4	+12.0	+12.6	V _D	
Power Consumption			1.5		Watts	Steady state @ 25°C, In Still Air
				4.0	Watts	@ Warm-up

**Specification for a Sinewave Output Thru-Hole
OCXO MtronPTI P/N: XO5085-068R**

Environmental Conditions:




Seal	Hermetic
RoHS	Full RoHS Compliance

Mechanical, Marking and Layout Information:

Part Marking	
Line 1	XO5085-068R
Line 2	100.0000MHz
Line 4	Serial Number
Line 5	Date Code

Legend	
yy	Year
ww	Work Week

Pin	Function
1	RF Output
2	Case Ground
3	V _{TUNE}
4	N/C
5	Supply Voltage

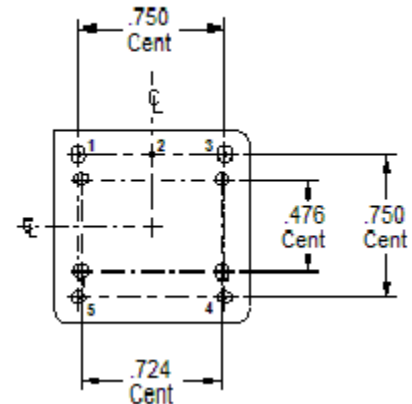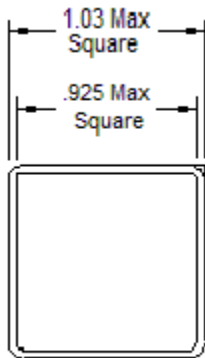

Data Sheet Revision Table:

Date	Rev.	Orig.	Details of Revision
04-03-18	B	DPD	After customer approval phase noise specification changed from -175dBc/Hz to -172dBc/Hz at 10KHz offset
02-15-17	A	DPD	Original release