

2525 Shader Road Orlando Florida 32804 USA Phone: 407-298-2000 Fax: 407-293-2979 Website: www.mtronpti.com AMEX: LGL



# Specification for a Sinewave Output SMT OCXO MtronPTI P/N: XO5085-099sR

## **Electrical Specifications:**

Parameter	Symbol	Min.	Тур.	Max.	Units	Conditions
Nominal Frequency	FO		100.0000		MHz	
			Frequency Stab	ilities		
vs. Temperature	ΔFT/F	-100		+100	ppb	Over the Operating
·						Temperature Range
vs. Supply voltage		-30		+30	ppb	5% change in supply
variation						voltage
Daily Aging		-5		+5	ppb	4
1 Year Aging		-0.5		+0.5	ppm	After 30-days Power On
20-Years Aging		-2.0	25.0	+2.0	ppm	
			RF Output		T	
Output Type			Sinewave	T	10	
Output Level			7		dBm	1400/
Output Load		_	50		Ω	±10%
		F	requency Adjus			
Adjustment Method	\/=		External		1 1/-	
Adjustment Voltage	VTUNE	0		+5	VD	
Adjustment Range		±1.5			ppm	Over all conditions
Adjustment Slope			Posit			
			Additional Paran	1	1 ,- ,,	The second second
				-97	dBc/Hz	10Hz Offset
Phase Noise				-130	dBc/Hz	100Hz Offset
(Under Static				-158	dBc/Hz	1kHz Offset
•				-167	dBc/Hz	10kHz Offset
Conditions)				-170	dBc/Hz	100kHz Offset
				-170	dBc/Hz	1MHz Offset
				-170	dBc/Hz	10MHz Offset
Harmonics				-25	dBc	
Spurious				-75	dBc	
						To within ±0.1ppm of the
Warm-up Time				5	minutes	frequency after 1-hour
						of operation @ 25°C
	Tem	perature, Su	pply Voltage & I	Power Consu	mption	•
Operating Temperature	OTR	-40	-	+85	°C	Full Specification
						Compliance
Storage Temperature	STR	-55		+85	°C	
Operating Voltage	VCC	+4.75	+5.0	+5.25	VD	
Power Consumption			1.5		Watts	Steady state @ 25°C, In Still Air
rower Consumption				4.0	Watts	@ Warm-up
				4.0	vvalis	I @ waiii-up



2525 Shader Road Orlando Florida 32804 USA Phone: 407-298-2000 Fax: 407-293-2979

AMEX: LGL Website: www.mtronpti.com



### **Specification for a Sinewave Output SMT** OCXO MtronPTI P/N: XO5085-099sR

#### **Environmental Conditions:**


Seal	Hermetic
RoHS	Full RoHS Compliance

## **Mechanical, Marking and Layout Information:**

Part Marking		
Line 1	XO5085-099sR	
Line 2	100.0000MHz	
Line 4	Serial Number	
Line 5	Date Code	

Legend	
уу	Year
ww	Work Week

Pin	Function
1	RF Output
2	N/C
4	Case Gnd
6	N/C
7	V <sub>Tune</sub>
13	N/C
15	N/C
17	N/C
19	Supply Voltage

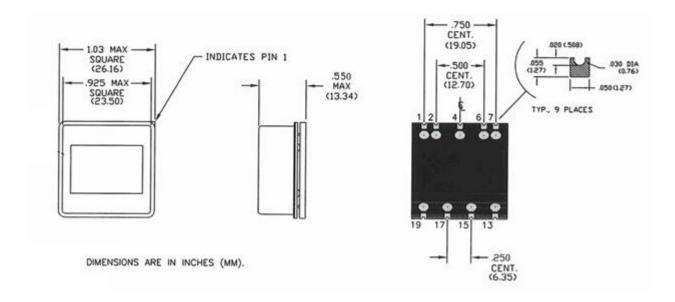

UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES TOLERANCES DECIMALS .XX ± .01 .005 ± .005

#### **Data Sheet Revision Table:**

Date	Rev.	Orig.	Details of Revision
11-06-18	Α	DPD	Original release-Same except -082R, SMT part.